

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

## PATENT COOPERATION TREATY

EXPRESS EL902321740 KA/KA

From the  
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

PCT

To:

TRIPOLI, Joseph S. et al.  
THOMSON MULTIMEDIA LICENSING INC.  
P.O. Box 5312  
2 Independence Way  
Princeton, New Jersey 08540  
ETATS-UNIS D'AMERIQUE

NOTIFICATION OF TRANSMITTAL OF  
THE INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT

(PCT Rule 71.1)

Date of mailing  
(day/month/year)

12.10.2001

Applicant's or agent's file reference  
RCA 89645

## IMPORTANT NOTIFICATION

International application No.  
PCT/US00/19059International filing date (day/month/year)  
13/07/2000Priority date (day/month/year)  
16/07/1999Applicant  
THOMSON LICENSING S.A. et al.

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

## 4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.


For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Event

Deadline

16 NOV 2001  
DPF 10/19/01

Name and mailing address of the IPEA/



European Patent Office  
D-80298 Munich  
Tel. +49 89 2399 - 0 Tx: 523656 epmu d  
Fax: +49 89 2399 - 4465

Authorized officer

Schalinatus, D



Tel. +49 89 2399-8242



# PCT

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference <b>RCA 89645</b>		<b>FOR FURTHER ACTION</b>	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. <b>PCT/US00/19059</b>	International filing date (day/month/year) <b>13/07/2000</b>	Priority date (day/month/year) <b>16/07/1999</b>	
International Patent Classification (IPC) or national classification and IPC <b>H04N5/50</b>			
Applicant <b>THOMSON LICENSING S.A. et al.</b>			
<p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of 5 sheets, including this cover sheet.</p> <p><input type="checkbox"/> This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of sheets.</p>			
<p>3. This report contains indications relating to the following items:</p> <ul style="list-style-type: none"> <li>I <input checked="" type="checkbox"/> Basis of the report</li> <li>II <input type="checkbox"/> Priority</li> <li>III <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability</li> <li>IV <input type="checkbox"/> Lack of unity of invention</li> <li>V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement</li> <li>VI <input type="checkbox"/> Certain documents cited</li> <li>VII <input checked="" type="checkbox"/> Certain defects in the international application</li> <li>VIII <input type="checkbox"/> Certain observations on the international application</li> </ul>			
Date of submission of the demand  <b>14/02/2001</b>		Date of completion of this report  <b>12.10.2001</b>	
Name and mailing address of the international preliminary examining authority:  <b>European Patent Office</b> <b>D-80298 Munich</b> <b>Tel. +49 89 2399 - 0 Tx: 523656 epmu d</b> <b>Fax: +49 89 2399 - 4465</b>		Authorized officer  <b>de Dieuleveult, A</b>  Telephone No. <b>+49 89 2399 8946</b> 	

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/US00/19059

**I. Basis of the report**

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

**Description, pages:**

1-15 as originally filed

**Claims, No.:**

1-16 as originally filed

**Drawings, sheets:**

1/4-4/4 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).  
☐ the language of publication of the international application (under Rule 48.3(b)).  
☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.  
☐ filed together with the international application in computer readable form.  
☐ furnished subsequently to this Authority in written form.  
☐ furnished subsequently to this Authority in computer readable form.  
☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.  
☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:  
☐ the claims, Nos.:

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/US00/19059

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

**1. Statement**

Novelty (N)	Yes:	Claims	2-13,15,16
	No:	Claims	1,14
Inventive step (IS)	Yes:	Claims	
	No:	Claims	1-16
Industrial applicability (IA)	Yes:	Claims	1-16
	No:	Claims	

**2. Citations and explanations**  
**see separate sheet**

**VII. Certain defects in the international application**

The following defects in the form or contents of the international application have been noted:  
**see separate sheet**

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/US00/19059

**V. Reasoned statement**

1. Reference is made to the following documents:

D1: GB-A-2 325 805 (DAEWOO ELECTRONICS' CO LTD) 2 December 1998

D2: EP-A-0 574 273 (TOSHIBA KK) 15 December 1993

2. Claim 1:

Document D1 discloses (see its abstract and the paragraph on page 6, lines 7-21) a method for processing a plurality of channels, the method comprising the steps of:

- selecting a channel from the plurality of channels;
- receiving a signal associated with the selected channel;
- determining whether the selected channel is digital;
- determining whether the selected channel is analog;
- storing information associated with the selected channel; and
- repeating said selecting, receiving, digital channel determining, analog channel determining and storing steps until each of the plurality of channels have been selected.

Consequently, the subject-matter of claim 1 is not new.

3. Claim 14:

The corresponding computer readable medium storing a software program that causes the computer to perform the method claimed above is therefore also anticipated, implicitly, by prior art document D1.

4. Claim 8:

The apparatus comprising the conventional elements for carrying out said method, as readily found for instance in D2 (see in particular column 8, lines 40-51 and col. 11, l. 1-54), thus is also considered not to involve an inventive step with respect to the combined disclosure of D1 and D2.

5. Claims 2-7, 9-13, 15 and 16:

These dependent claims do not appear to comprise any additional features that would render their subject-matter new and inventive over the available prior art. Therefore, these claims fail together with the independent claims for lack of novelty, or at least for lack of inventive step.

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/US00/19059

**VII. Certain defects**

1. The independent claims are not in the two-part form in accordance with Rule 6.3(b) PCT, which in the present case would be appropriate, with those features known in combination from the prior art (document D1) being placed in the preamble (Rule 6.3(b)(i) PCT) and with the remaining features being included in the characterising part (Rule 6.3(b)(ii) PCT).
2. The features of the claims are not provided with reference signs placed in parentheses (Rule 6.2(b) PCT).
3. Contrary to the requirements of Rule 5.1(a)(ii) PCT, the relevant background art disclosed in the document D1 is not mentioned in the description, nor is this document identified therein.
4. Corrections should be made:
  - on p. 8, l. 15: "signal/bearing" should read "signal-bearing";
  - on p. 9, l. 12: "312" should read "212";
  - on p. 12, l. 27: "328" should read "210";
  - on p. 14, l. 9: "416" should read "418";
  - in claims 12 and 13: "method" should read "apparatus";
  - in Fig. 3: the arrowhead located by the output "N" of block 340 should be deleted; "ANANALOG" in block 210 should read "ANALOG".

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>RCA89645</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/US 00/ 19059</b>	International filing date (day/month/year) <b>13/07/2000</b>	(Earliest) Priority Date (day/month/year) <b>16/07/1999</b>
Applicant <b>THOMSON LICENSING S.A. et al.</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.



It is also accompanied by a copy of each prior art document cited in this report.

## 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.



the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :



contained in the international application in written form.



filed together with the international application in computer readable form.



furnished subsequently to this Authority in written form.



furnished subsequently to this Authority in computer readable form.



the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.



the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of Invention is lacking** (see Box II).

4. With regard to the **title**,

the text is approved as submitted by the applicant.



the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

the text is approved as submitted by the applicant.



the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.



as suggested by the applicant.



because the applicant failed to suggest a figure.



because this figure better characterizes the invention.

2



None of the figures.



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/19059

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N5/50

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	GB 2 325 805 A (DAE WOO ELECTRONICS CO LTD) 2 December 1998 (1998-12-02) the whole document ---	1,2,8,14
Y A	EP 0 574 273 A (TOSHIBA AVE KK ;TOKYO SHIBAURA ELECTRIC CO (JP)) 15 December 1993 (1993-12-15) column 7, line 54 -column 8, line 39 column 10, line 54 -column 11, line 54; figure 6 ---	1,2,8,14  3,15
A	EP 0 912 050 A (SAMSUNG ELECTRONICS CO LTD) 28 April 1999 (1999-04-28) column 4, line 26 -column 5, line 22 column 5, line 50 -column 6, line 45 --- -/--	1,6-8, 10,16



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

26 September 2000

Date of mailing of the international search report

02/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Fuchs, P

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/19059

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 805 230 A (STARON ALAIN) 8 September 1998 (1998-09-08) column 1, line 49 -column 2, line 30 column 3, line 47 -column 5, line 65; figures 2,3 -----	1,8,14
A	EP 0 766 462 A (SAMSUNG ELECTRONICS CO LTD) 2 April 1997 (1997-04-02) column 3, line 53 - line 47 column 14, line 10 - line 45; figures 1,2,5 column 16, line 5 - line 52; figure 8 -----	1,8,14

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/19059

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2325805	A	02-12-1998	JP 10341176 A	22-12-1998
EP 0574273	A	15-12-1993	JP 5347736 A	27-12-1993
			CA 2098372 A	13-12-1993
			DE 69320868 D	15-10-1998
			DE 69320868 T	28-01-1999
			KR 9615838 B	21-11-1996
			US 5418815 A	23-05-1995
EP 0912050	A	28-04-1999	KR 222994 B	01-10-1999
US 5805230	A	08-09-1998	FR 2717026 A	08-09-1995
			EP 0696402 A	14-02-1996
			WO 9524098 A	08-09-1995
			JP 9501555 T	10-02-1997
EP 0766462	A	02-04-1997	CN 1151656 A	11-06-1997
			JP 9130697 A	16-05-1997
			KR 213048 B	02-08-1999
			US 6014178 A	11-01-2000
			US 5926228 A	20-07-1999

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
25 January 2001 (25.01.2001)


PCT

(10) International Publication Number  
**WO 01/006775 A1**

- (51) International Patent Classification<sup>7</sup>: **H04N 5/50**
- (21) International Application Number: **PCT/US00/19059**
- (22) International Filing Date: **13 July 2000 (13.07.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
60/144,336                      16 July 1999 (16.07.1999)    **US**
- (71) Applicant (for all designated States except US): **THOMSON LICENSING S.A.** [FR/FR]; 46, quai Alphonse Le Gallo, F-92648 Boulogne Cedex (FR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **JOHNSON, Gene, Harlow** [US/US]; 14370 Whisperwind Drive, Carmel, IN 46032 (US). **MAYER, Matthew, Thomas** [US/US]; 9340-A Kungsholm Drive, Indianapolis, IN 46250 (US). **BOUILLET, Aaron, Reel** [US/US]; 1520 Persimmon Place, Noblesville, IN 46060-9713 (US).
- (54) Agents: **TRIPOLI, Joseph, S.** et al.; Thomson multimedia Licencing Inc., P.O. Box 5312, 2 Independence Way, Princeton, NJ 08540 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR AUTOPROGRAMMING A TELEVISION RECEIVER

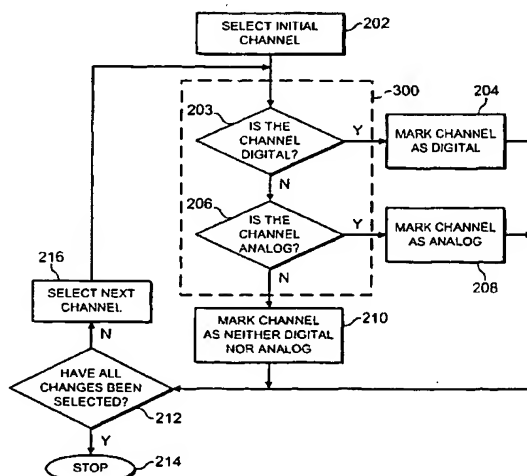

(57) Abstract: An apparatus for automatically programming information associated with a plurality of air and cable television channels. Upon receiving an autoprogramming signal, the apparatus detects analog and digital television signals from each channel to determine whether the associated air or cable channel is digital or analog. The apparatus stores information associated with the each channel into a memory unit. The results of all channels are displayed as a channel scanning list on an output device or monitor. A method for processing a plurality of air and cable television channels is also provided. The method selects a channel, receives an analog or digital signal associated with the selected channel, determines whether the channel is analog or digital, stores the result and repeats the steps until all channels have been selected. Additionally, a computer readable medium that stores a software program is provided. This program, when executed by a computer, causes the computer to perform the method embodied in the invention.

WO 01/006775 A1



**(48) Date of publication of this corrected version:**

8 August 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(15) Information about Correction:**

see PCT Gazette No. 32/2002 of 8 August 2002, Section II

**METHOD AND APPARATUS FOR AUTOPROGRAMMING A TELEVISION RECEIVER****FIELD OF THE INVENTION**

The invention generally relates to television systems. More particularly,  
5 the invention relates to a method and apparatus for autoprogramming analog and digital television signal information associated with broadcast and cable channels.

**DESCRIPTION OF THE PRIOR ART**

10 Television receivers use channel autoprogramming algorithms and systems for automatically detecting active television channels and indicating these channels in a scanning list. The channels may comprise broadcast or air channels for transmitting radio frequency (RF) signals to the receiver via an antenna. Alternatively, the channels may comprise cable channels for  
15 transmitting RF signals to the receiver via a cable network.

The current autoprogramming algorithms and systems are limited to processing analog television channels. One such autoprogramming algorithm and system is described in U.S. Patent No. 4,776,038, issued to Testin et al. on October 4, 1988. Recent advances and increased use of digital television  
20 systems have created a need for autoprogramming digital television channels. However, the analog television receivers cannot autoprogram the signals associated with the digital television channels. As such, separate systems are typically required for detecting and indicating the respective analog and digital television channels.

25 Therefore, there is a need for a method and apparatus for extending the autoprogramming algorithms and systems to incorporate digital television channels.

**SUMMARY OF THE INVENTION**

30 The invention overcomes the disadvantages of the prior art by providing a method and apparatus for extending the autoprogramming algorithms and systems to incorporate digital television channels. Specifically, the apparatus

comprises a tuner, a digital signal converter, an analog signal converter, a video processor, a microprocessor and a memory unit. The tuner converts a radio frequency (RF) signal into an intermediate frequency (IF) signal. The analog signal converter demodulates the IF signal from the tuner into a baseband analog  
5 signal and generates tuning and video synchronization signals. The digital signal converter downconverts the IF signal into a near baseband signal, demodulates the near baseband signal into a baseband digital signal, and generates synchronization and error correction signals. The video processor further processes video and audio components of the respective baseband analog and  
10 digital signals for display on an output device. The memory unit stores the autoprogramming algorithm and information associated with the analog and digital television channels.

The microprocessor executes the autoprogramming algorithm or program that is stored in the memory unit. The microprocessor controls the tuner,  
15 receives signals from the analog and digital signal converters, determines the type of channel based on the received signals, stores the result in the memory unit and repeats the procedure for each available channel until all channels are processed.

A method for processing a plurality of television channels is also provided.  
20 Specifically, the method comprises the steps of selecting a channel from a plurality of channels, receiving a signal associated with the selected channel, and determining whether the selected channel is digital or analog, storing information associated with the selected channel into a memory unit. These steps are repeated for each of the plurality of channels. Additionally, a computer readable  
25 medium that stores a software program is provided. This program, when executed by a computer, causes the computer to perform the method embodied in the invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

30 The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1 depicts a block diagram of a television receiver capable of receiving analog and digital signals;

FIG. 2 depicts a flow chart of a method for scanning various channels;

FIG. 3 depicts a flow chart of a method for detecting whether a channel is analog, digital or neither; and

FIG. 4 depicts a flow chart of a method for detecting a whether a channel is digital.

To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

#### DETAILED DESCRIPTION

FIG. 1 depicts a block diagram of a television receiver 100 capable of receiving analog and digital television signals. The receiver 100 comprises a tuner 102, a digital demodulator 104, a forward error correction (FEC) module 106, a digital signal processor 108, an analog demodulator 110, an analog signal processor 112, a microprocessor 114, a memory unit 116 and a video processor 118. Additionally, the receiver 100 interfaces with a signal interface 120, an input device 122 and an output device 124.

The tuner 102 receives modulated radio frequency (RF) signals via a signal interface 120. Different signal interfaces 120 are required depending on whether the received RF signals are associated with air channels (also known as broadcast channels) or cable channels. If the tuner 102 receives television signals from air channels, then the signal interface 120 comprises an antenna. If the tuner 102 receives television signals from cable channels, then the signal interface 120 comprises a cable network connection. The signal interface 120 may receive various signal types from various sources.

The RF signals associated with air and cable channels are analog and digital television signals. The analog television signal may comprise a conventional National Television Standard Committee (NTSC) modulated signal within the United States. The digital television signal may comprise a Vestigial Sideband (VSB) modulated signal in compliance with the Advanced Television Systems Committee (ATSC) standard A/53.



The tuner 102 converts or heterodynes the received RF signal into an intermediate frequency (IF) signal. Once the microprocessor 114 receives an autoprogramming command from the input device 122, the microprocessor 114 initiates a search of the active channels. For each channel, the microprocessor 114 sends a voltage signal to the tuner 102 that corresponds to the required local oscillator (LO) frequency. After the microprocessor 114 determines the appropriate LO frequency for a selected channel, the tuner 102 converts the RF signal into an IF signal. In the United States, the IF of the video carrier is 45.75 MHz for the analog television signal and 44 MHz for the digital television signal.

After the tuner 102 converts the received television signal into an IF signal, the television receiver 100 processes the digital and analog IF television signals. Specifically, the television receiver comprises a digital signal converter 126 to process the IF digital television signal and an analog signal converter 128 to process the IF analog television signal. The digital signal converter 126 comprises the digital demodulator 104, forward error correction module 106 and the digital signal processor 108. The analog signal converter comprises an analog demodulator 110 and the analog signal processor 112. The video processor 118 further processes the video and audio components of the respective analog and digital television signals into a suitable format for display on the output device 124.

The digital demodulator 104 downconverts the IF digital television signal into a near baseband (NBB) signal, performs carrier lock on the NBB signal to convert the NBB signal to a baseband digital symbol stream, and performs symbol timing on this symbol stream. To perform these functions, the digital demodulator 104 includes a frequency downconverting stage, a carrier recovery loop and a symbol timing recovery loop. The frequency downconverting stage receives the IF signal, centered at 44 MHz, from the tuner 102 and downconverts the IF signal frequency to a NBB frequency, e.g., 5.38 MHz (or half the symbol rate of the digital data stream).

The carrier recovery loop generates a local oscillator (LO) signal that is matched or phase-locked to the carrier in the NBB signal. Once phase lock occurs, this loop generates a Carrier Lock signal to the microprocessor 114. The

carrier recovery loop then mixes the LO signal with the NBB signal for removing the carrier in the NBB signal and converting the NBB signal to a baseband data stream.

After sending the Carrier Lock signal, the symbol timing recovery loop matches or phase-locks the baseband data stream for recovering a data symbol stream from the baseband data stream. The data stream comprises a sequence of data fields. Each data field includes one field synchronization (sync) segment and 312 data segments. Each data segment includes 4 segment sync symbols and 828 symbols for payload and error check. These 4 segment sync symbols represents a segment sync word. If the digital television signal is an 8-VSB signal, then the payload symbols include a 188-byte MPEG-2 data packet and the error check symbols include 20 parity bytes.

As each sync segment includes one segment sync word, the segment sync words are periodic within the data stream, illustratively, at 10.76 Msymbols/sec. In the case of an 8-VSB digital television signal, the segment sync word includes a reference pattern of 1, -1, -1, 1. Once the digital demodulator correlates the segment sync word to a predetermined level of confidence, the digital demodulator 104 sends a Segment Lock signal to the microprocessor 114.

After the digital demodulator 104 achieves segment lock, the forward error correction (FEC) module 106 detects and corrects errors in the demodulated digital signal. To compensate the effects of changing conditions and disturbances in the signal transmission channel, the FEC module 106 comprises an adaptive equalizer for removing the channel distortions or performing channel equalization. However, the adaptive equalizer may introduce a variable delay to the data stream. As such, the data stream from the equalizer may no longer be aligned with the segment synchronization signals. The FEC module 106 must realign the data stream to the segment sync signals for enabling forward error correction of the data streams. When this occurs, the FEC module 106 provides a FEC Lock signal to the microprocessor 114.

Additionally, the FEC module 106 comprises an error correction module such as a Reed Solomon decoder. The Reed Solomon decoder uses the 20 parity

bytes in each segment for correcting the 187 data bytes in each data packet. The Reed Solomon decoder may correct up to 10 erroneous bytes per packet. As such, the packet contains uncorrectable errors if the packet contains more than 10 erroneous bytes.

5       The number of uncorrectable packet errors per second is the Reed Solomon Error Rate. If the error rate is sufficiently low, then the FEC module 106 sends a Reed Solomon Error Rate signal to the microprocessor 114. However, if this error rate is too high, then the digital signal processor 108 may not properly decode the associated video and audio information in the data  
10       stream.

      The digital signal processor 108 separates the baseband digital signal or data stream into video and audio component signals. The video processor 118 further processes the component signals into a suitable format for display on the output device 124. The output device 124 is television monitor or some other  
15       display device.

      The analog demodulator 110 demodulates the analog IF modulated signal into a baseband signal comprising video and audio components. Additionally, the analog demodulator 110 comprises an automatic fine tuning (AFT) circuit for determining whether the video component of the IF signal deviates from the  
20       nominal IF frequency of 45.75 MHz. If the frequency of the video component is above 45.75 MHz, then the AFT circuit decides that the video component frequency is too high and provides a "00" value to the microprocessor 114. If the frequency of the video component is below 45.75 MHz, the AFT circuit decides that the video component frequency value is too low and provides a  
25       "11" value to the microprocessor 114. Other possible values of the AFT circuit are also contemplated within the scope of the invention.

      The analog signal processor 112 separates the baseband analog television signal into video and audio component signals. As with the corresponding video and audio signals of the digital television signal, the video processor 118 further  
30       processes the component analog television audio and video signals for display on the output device 124. Additionally, the analog signal processor 112 derives a composite synchronization ("SYNC") signal from the video signal. Such a

composite SYNC signal typically comprises horizontal and vertical video synchronization signals. The composite SYNC signal is coupled to the microprocessor 114.

The microprocessor 114 coordinates the channel detection and  
5 autoprogramming functions associated with the television receiver 100. Initially, the microprocessor 114 receives an autoprogramming command from the input device 122 such as a remote control, keyboard or other devices for entering data. For example, the input device 122 may direct the microprocessor 114 to search all of the active air and/or cable channels. As the air and cable channels  
10 are used for transmitting analog and digital television signals, the microprocessor 114 detects the type of television signal for each channel searched. Once the microprocessor 114 detects the type of television signal transmitted over each air and/or cable channel, the microprocessor 114 stores or loads the channel information in the memory unit 116. The microprocessor 114 indicates whether  
15 a given air or cable channel is analog or digital depending on the type of television signal detected. The channel information is retrieved from the memory unit 116 and shown on the output device 124 or display.

Additionally, the microprocessor 114 executes software programs to properly detect whether the channels associated with television signals are  
20 analog, or digital. The software programs are stored in the memory unit 116 such as a read only memory (ROM). Upon executing the software programs, the microprocessor 114 utilizes signals from the digital demodulator 104, the FEC module 106, the analog demodulator 110 and the analog signal processor 112. These signals include Carrier Lock and Segment Lock signals from the  
25 digital demodulator 104, and FEC Lock and Reed Solomon Error Rate signals from the FEC module 106.

The microprocessor 114 initially scans the channels as depicted in FIG. 2. For each channel that is receivable, the associated television signal is determined as being either analog or digital as further depicted in FIG. 3. Specifically, as  
30 depicted in FIG. 4, if the television signal is not digital, then the AFT signal from the analog demodulator 110 and the composite SYNC signal from the analog signal processor 112 are used to determine whether the television signal and

corresponding channel is analog. Each channel is marked as either analog or digital depending on the type of television signal. Finally, the channel information is automatically programmed into the memory unit 116, e.g., a random access memory (RAM) or an electrically erasable programmable read only memory (EEPROM).

The channel information is displayed on the output device 124 as a channel scanning list. As the information about the channels is stored in the memory unit 116 and displayed on the output device 124, the television receiver 100 does not need to determine whether the user selected channel is analog or digital. As such, once a channel is selected, the time required for tuning that channel is reduced.

The present invention may also be implemented as a program product for use with a computer system, e.g., a television system. The program(s) of the program product defines functions that can be contained on a variety of signal/bearing media, which include, but are not limited to, (i) information permanently stored on non-writable storage media, (e.g., read-only memory devices within a computer such as CD-ROM disks readable by a CD-ROM drive); (ii) alterable information stored on writable storage media (e.g., floppy disks within a diskette drive or hard-disk drive); or (iii) information conveyed to a computer by a communications medium, such as through a computer or telephone network, including wireless communications. Such signal-bearing media, when carrying computer-readable instructions that direct the functions of the present invention, represent additional embodiments of the present invention.

FIG. 2 depicts a flow chart of a method 200 for detecting a plurality of channels. The microprocessor 114 executes a software program (that embodies this method 200) to scan or select channels. After detecting all of the selected channels, the microprocessor 114 stores or loads the information associated with the channels into the memory unit 116.

The method 200 initially selects an initial channel at step 202. The method 200 proceeds to at step 203, for determining whether the present channel is a digital channel. Step 203 is embodied in a method 400 as further described in FIG. 4 below. If the channel is digital, the method 200 proceeds to

step 204, where the present channel is marked as a digital channel. If the channel is not digital, then the method 200 proceeds to step 206 for determining whether the present channel is an analog channel. If the selected channel is analog, then the method 200 proceeds to step 208, where the present channel is marked as an analog channel. Otherwise, the method 200 proceeds to step 210, where the present channel is marked as neither a digital channel nor an analog channel. The combination of steps 203 and 206 is embodied in a method 300 as further described in FIG. 3 below. As such, method 300 determines whether the present channel is digital or analog.

After the method 200 marks the channel in respective steps 204, 208 and 210, the method 200 proceeds to determine whether all the channels have been selected or searched at step 312. If all the channels have been selected, the method 200 proceeds to step 214 and stops. If there are additional channels to select, the method 200 proceeds to select the next available channel at step 216 and repeats itself (method 200) until all channels have been selected.

As previously mentioned, the combination of steps 203 and 206 is embodied within a method 300. FIG. 3 depicts a flow chart of a method 300 for detecting whether the channel is analog, digital, or neither analog nor digital. The method 300 processes analog and digital signals associated with the selected air and cable channels. The method 300 is implemented each time a new channel is selected or scanned.

The channel detection method 300 starts at step 302. The method 300 proceeds to step 304, where the LO frequency is selected such that the tuner 102 converts the incoming RF signal to an intermediate frequency (IF) equivalent to a nominal frequency value, i.e., 44 MHz for a digital television signal. At step 306, the method 300 presumes that the television receiver 100 receives a digital television signal. The method 300 proceeds to step 307 to determine whether the selected or scanned channel is digital. Step 307 is embodied in the method 400 of FIG. 4. If the channel is digital, then the method 300 proceeds to step 204, where the channel is detected and marked as a digital channel. If the channel is not digital, then the method 300 proceeds to step 308, where the

method 300 presumes that the television receiver 100 receives an analog television signal.

The method 300 proceeds to step 310, where the frequency of the LO is set such that the tuner 102 converts the incoming RF signal to an IF that is 0.1875 MHz above the nominal IF frequency. The nominal IF is 45.75 MHz for the video carrier portion of the analog television signal in the United States. The 0.1875 MHz deviation represents three 62.5 kHz steps, where each 62.5 kHz step or increment represents the resolution of the phase lock loop (PLL) integrated circuit (IC) in the tuner 102. This 0.1875 MHz deviation represents a far enough deviation from the nominal IF frequency, such that the AFT circuit may determine whether the converted IF frequency is too high or too low. At step 312, the method 300 determines whether the automatic fine tuning (AFT) value is 00. If the AFT value equals 00, then the method 300 proceeds to step 314. If the AFT value is not 00, then the method 300 proceeds to step 316.

At step 314, the frequency of the LO is set such that the tuner 102 converts the incoming RF signal to an IF that is 0.1875 MHz below the nominal frequency. The method 300 proceeds to step 318 for determining whether the AFT value equals 11. If the AFT equals 11, then the method 300 proceeds to step 320. In this case, the video component of the IF analog television signal is properly centered about the nominal IF of 45.75 MHz. If the AFT does not equal 11, then the method 300 proceeds to step 316.

At step 320, the method 300 determines whether the microprocessor 114 detects the SYNC (synchronization) signal from the analog processor 112. If the microprocessor 114 detects the SYNC signal, then the method 300 proceeds to step 322. If the microprocessor 114 fails to detect the SYNC signal, then the method 300 proceeds to step 316.

At step 322, method 300 determines that the received television signal is analog. The method 300 proceeds to step 208, where the microprocessor 114 marks the detected channel as an analog channel and stores the result in the memory unit 116.

At step 316, the method 300 determines whether the detected channel is a cable channel or an air (broadcast) channel. If the detected channel is an air

channel, then the method 300 proceeds to step 210, where the microprocessor 114 marks the channel as neither an active analog or digital channel. This result is stored in the memory unit 116. If the detected channel is a cable channel, the method 300 proceeds to step 324. At step 324, the method 300 presumes that the television receiver 100 receives a digital television signal.

The signals associated with cable channels may have a harmonically related carrier (HRC) or an incrementally related carrier (IRC). The method 300 proceeds step 326, where the frequency of the LO is set such that the tuner 102 converts the incoming RF signal to an IF associated with the HRC frequency. The method 300 then proceeds to step 327 for determining whether the cable channel is digital. As with step 307, step 327 is embodied in method 400 of FIG. 4. If the cable channel is digital, then the method 300 proceeds to step 204, where the cable channel is detected and marked as a digital channel. If the cable channel is not digital, then the method 300 proceeds to step 328, where the method 300 presumes that the television receiver 100 receives an analog television signal associated with cable channels.

At step 330, the frequency of the LO is set such that the tuner 102 converts the incoming RF signal to an IF that is 0.1875 MHz above the HRC frequency. The method 300 proceeds to step 332, where the microprocessor 114 determines whether the automatic fine tuning (AFT) value equals 00. The AFT value is coupled to the microprocessor through the analog demodulator 110. If the AFT value equals 00, then the method 300 proceeds to step 334. If the AFT value is not 00, then the method 300 proceeds to step 336.

At step 334, the frequency of the LO is set such that the tuner 102 converts the incoming RF signal to an IF that is 0.1875 MHz below the HRC frequency. The method 300 proceeds to step 338, where the microprocessor 114 determines whether the AFT signal equals 11. If the AFT signal equals 11, then the method proceeds to step 340, where the method 300 determines whether the microprocessor 114 detects the SYNC (synchronization) signal from the analog processor 112. If the microprocessor 114 detects the SYNC signal, then the method 300 proceeds to step 322 and then to step 208 for detecting the cable channel as analog. If the microprocessor 114 fails to detect the SYNC



signal, then the method 300 proceeds to step 210, where the cable channel is detected as neither an analog or digital channel.

At step 336, the microprocessor 114 determines whether the selected cable channel is either channel 5 or 6. As the HRC and IRC frequencies are the same for all cable channels except cable channels 5 and 6, the method 300 determines whether a cable signal is located at IRC frequency for cable channels 5 or 6. If the selected cable channel is channel 5 or 6, then the method 300 proceeds to step 342. Otherwise, there is no need to locate any additional signals and the method 300 proceeds to step 210, where the cable channel is detected as neither an active analog nor digital channel.

At step 342, the method 300 presumes that the television receiver 100 receives a digital television signal. The method 300 proceeds step 344, where the frequency of the LO is set such that the tuner 102 converts the incoming RF signal to an IF associated with the IRC frequency. The method 300 then proceeds to step 345 for determining whether the cable channel is digital. As with steps 307 and 327, step 345 is embodied in method 400 of FIG. 4. If the cable channel is digital, then the method 300 proceeds to step 204, where the cable channel is detected and marked as a digital channel. If the cable channel is not digital, then the method 300 proceeds to step 346, where the method 300 presumes that the television receiver 100 receives an analog television signal associated with cable channels.

The method 300 proceeds to step 348, where the local oscillator frequency is set such that the tuner 102 converts the incoming RF signal to an IF that is 0.1875 MHz above the IRC frequency. At step 350, the microprocessor 114 determines whether the automatic fine tuning (AFT) value equals 00. If the AFT value equals 00, then the method 300 proceeds to step 352. If the AFT value is not 00, then the method 300 proceeds to step 328.

At step 352, the frequency of the LO is set such that the tuner 102 converts the incoming RF signal to an IF that is 0.1875 MHz below the IRC frequency. The method 300 proceeds to step 354, where the microprocessor 114 determines whether the AFT signal equals 11. If the AFT signal equals 11, then the method 300 proceeds to step 340, where the method 300 determines

whether the microprocessor 114 detects the SYNC (synchronization) or video synchronization signal from the analog processor 112. If the microprocessor 114 detects the SYNC signal, then the method 300 proceeds to step 322 and then to step 208 for detecting the cable channel an active analog channel. If the  
5 microprocessor 114 fails to detect the SYNC signal, then the method 300 proceeds to step 210, where the cable channel is detected as neither an active analog or digital channel.

FIG. 4 depicts a flow chart of a method 400 for detecting a digital channel. The method 400 determines whether a channel, associated with a  
10 digital signal, is a digital channel. At step 402, the method 400 initializes a failure timer for two seconds. As such, the method 400 must detect the selected digital channel before the timer times out in two seconds. The timer minimizes the delay introduced by the digital channel detection method 400.

The method 400 proceeds to step 404, where the LO frequency is  
15 selected such that the tuner 102 converts the incoming RF signal to an intermediate frequency (IF) equivalent to a nominal frequency value, 44 MHz for a digital television signal. At step 406, the method 400 determines whether the microprocessor 114 received the Carrier Lock signal from the digital demodulator 114. If the microprocessor 114 received the Carrier Lock signal, the method  
20 400 proceeds to step 408. If the microprocessor 114 fails to receive the Carrier Lock signal, the method 400 proceeds to step 410.

At step 410, the LO frequency is selected such that the tuner 102 converts the RF signal to an IF equal to 62.5 kHz above the nominal frequency. The 62.5 kHz increment represents the resolution of the phase lock loop (PLL)  
25 integrated circuit (IC) in the tuner 102. The method 400 proceeds to step 412, where the method 400 determines whether the microprocessor 114 received the Carrier Lock signal after changing the LO frequency. If the microprocessor 114 receives the Carrier Lock signal, then the method 400 proceeds to step 408. Otherwise, the method 400 proceeds to step 414, where the microprocessor  
30 114 marks the detected channel as not digital (or not an active digital channel). At this point, the method 400 concludes and reenters the method 300.

At step 408, the method 400 initializes symbol timing of the digital baseband signal. The method 400 proceeds to step 416, where the method 400 determines whether the microprocessor 114 receives a Segment Lock signal from the digital demodulator 104. If the microprocessor 114 receives the Segment Lock signal, then the method 400 proceeds to step 418. If the microprocessor 114 fails to receive the Segment Lock signal, the method proceeds to step 414. As such, the channel is not an active digital channel if the microprocessor 114 fails to receive either a Carrier Lock or Segment Lock signal.

At step 416, the method 400 determines whether the microprocessor 114 receives the FEC Lock signal from the forward error correction (FEC) module 106. If the microprocessor 114 receives the FEC Lock signal, then the method 400 proceeds to step 420. If the microprocessor 114 fails to receive the FEC Lock signal, the method 400 proceeds to step 422.

At step 420, the method 400 determines whether the microprocessor 114 receives the Reed Solomon Error Rate signal from the FEC module 106. If the microprocessor 114 receives the Reed Solomon Error Rate signal, then the method proceeds to step 424. In this case, the microprocessor 114 detects the selected channel as digital and stores the result in the memory unit 116. As such, the channel is detected as an active digital channel if there is a carrier lock, a segment lock, a FEC lock and a sufficiently low Reed Solomon error rate before the timer expires. If the microprocessor 114 fails to receive the Reed Solomon Error Rate signal, the method 400 proceeds to step 422.

At step 422, the method 400 determines whether the timer, illustratively two seconds, is expired. If the timer is expired, then the method 400 proceeds to step 414, where the channel is not detected as digital. The method 400 then proceeds back to method 300. If the time is still active, then the method 400 proceeds to step 424.

At step 424, the method 400 rechecks whether the microprocessor 114 receives a Carrier Lock signal. If the Carrier Lock is present, then the method 400 proceeds to step 408, where symbol timing is reinitialized. If the Carrier Lock is not present, then the method 400 proceeds to step 404 for effectively reevaluating the digital signal.

The methods described herein are not limited to the values or signals illustratively shown. Although various embodiments which incorporate the teachings of the present invention have been shown and described in detail herein, those skilled in the art can readily devise many other varied embodiments that still incorporate these teachings.

What is claimed is:

1. A method for processing a plurality of channels, the method comprising the steps of:

5        selecting a channel from the plurality of channels;  
         receiving a signal associated with the selected channel;  
         determining whether the selected channel is digital;  
         determining whether the selected channel is analog;  
         storing information associated with the selected channel ; and  
10        repeating said selecting, receiving, digital channel determining, analog  
         channel determining and storing steps until each of the plurality of channels have  
         been selected.

15        2. The method of claim 1 wherein the information associated with the  
         selected channel is stored into a memory unit.

         3. The method of claim 1 wherein said digital channel determining step  
         further comprises the steps of:  
                determining that the received signal is a digital baseband signal;  
20        receiving synchronization and error check signals from the received signal;  
                determining whether the generated synchronization and error check signals  
         are proper for a digital television signal; and  
                marking the selected channel as digital if the synchronization and error  
         check signals are proper.

25

4. The method of claim 3 wherein the synchronization signals comprise a  
Carrier Lock signal and a Segment Lock signal.

5. The method of claim 3 wherein the error check signals comprise a  
30 Forward Error Correction (FEC) signal and a Reed Solomon Error Rate signal.

6. The method of claim 1 wherein said analog channel determining step

further comprises the steps of:

determining that the received signal is an analog baseband signal;

determining whether a video carrier of the analog baseband signal is automatically fine tuned;

5 determining whether a video synchronization signal is detected;

marking the channel as analog if the video carrier is automatically fine tuned and the video synchronization signal is detected.

7. The method of claim 6 wherein said video synchronization is a composite  
10 SYNC signal having a vertical synchronization signal and a horizontal synchronization signal.

8. An apparatus for automatically programming information associated with a plurality of channels, the apparatus comprising:

15 a tuner for converting a radio frequency (RF) signal associated with each of the plurality of channels into an intermediate frequency (IF) signal;

a digital signal converter, coupled to said tuner, for demodulating the IF signal into a baseband digital signal and generating synchronization and error correction signals from the baseband digital signal;

20 an analog signal converter, coupled to said tuner, for demodulating the IF signal into a baseband analog signal and generating tuning and synchronization signals from the baseband analog signal;

a video processor, coupled to said digital and analog signal converters, for processing video and audio components of the baseband digital and analog  
25 signals to an output device;

a memory unit, for storing autoprogramming software and information associated with each of the plurality of channels; and

a microprocessor, coupled to said digital signal converter, said analog signal converter, said tuner and said memory unit, for controlling said tuner, receiving signals from said analog and digital signal converters, executing  
30 autoprogramming software, determining the type of channel for each of the plurality of channels and storing information about each of the plurality of

channels into said memory unit.

9. The apparatus of claim 8 wherein said digital signal converter comprises:  
a digital demodulator for demodulating the IF signal into a digital baseband  
5 signal and generating synchronization signals;  
a forward error correction (FEC) module, coupled to said digital  
demodulator, for generating error correction signals; and  
a digital signal processor, coupled to said FEC module, for separating the  
digital baseband signal into video and audio components.

10

10. The apparatus of claim 8 wherein the analog signal converter comprises:  
an analog demodulator for demodulating the IF signal into an analog  
baseband signal and generating tuning signals; and  
an analog signal processor, coupled to said analog demodulator, for  
15 generating video synchronization signals and separating the analog baseband  
signal into video and audio components.

11. The apparatus of claim 8 wherein said microprocessor determines the type  
of channel by executing autoprogramming software stored in said memory unit.

20

12. The method of claim 8 wherein the synchronization signals comprise a  
Carrier Lock signal and a Segment Lock signal.

13. The method of claim 8 wherein the error correction signals comprise FEC  
25 Lock and Reed Solomon Error Rate signals.

14. A computer readable medium storing a software program that, when  
executed by a computer, causes the computer to perform a method comprising:  
selecting a channel from the plurality of channels;  
30 receiving a signal associated with the selected channel;  
determining whether the selected channel is digital;  
determining whether the selected channel is analog;

storing information associated with the selected channel ; and  
repeating said selecting, receiving, digital channel determining, analog  
channel determining and storing steps until each of the plurality of channels have  
been selected.

5

15. The computer readable medium of claim 14 wherein said digital channel  
determining step further comprises the steps of:

determining that the received signal is a digital baseband signal;

receiving synchronization and error check signals from the received signal;

10

determining whether the generated synchronization and error check signals  
are proper for a digital television signal; and

marking the selected channel as digital if the synchronization and error  
check signals are proper.

15

16. The computer readable medium of claim 14 wherein said analog channel  
determining step further comprises the steps of:

determining that the received signal is an analog baseband signal;

determining whether a video carrier of the analog baseband signal is  
automatically fine tuned;

20

determining whether a video synchronization signal is detected;

marking the channel as analog if the video carrier is automatically fine  
tuned and the video synchronization signal is detected.



1 / 4

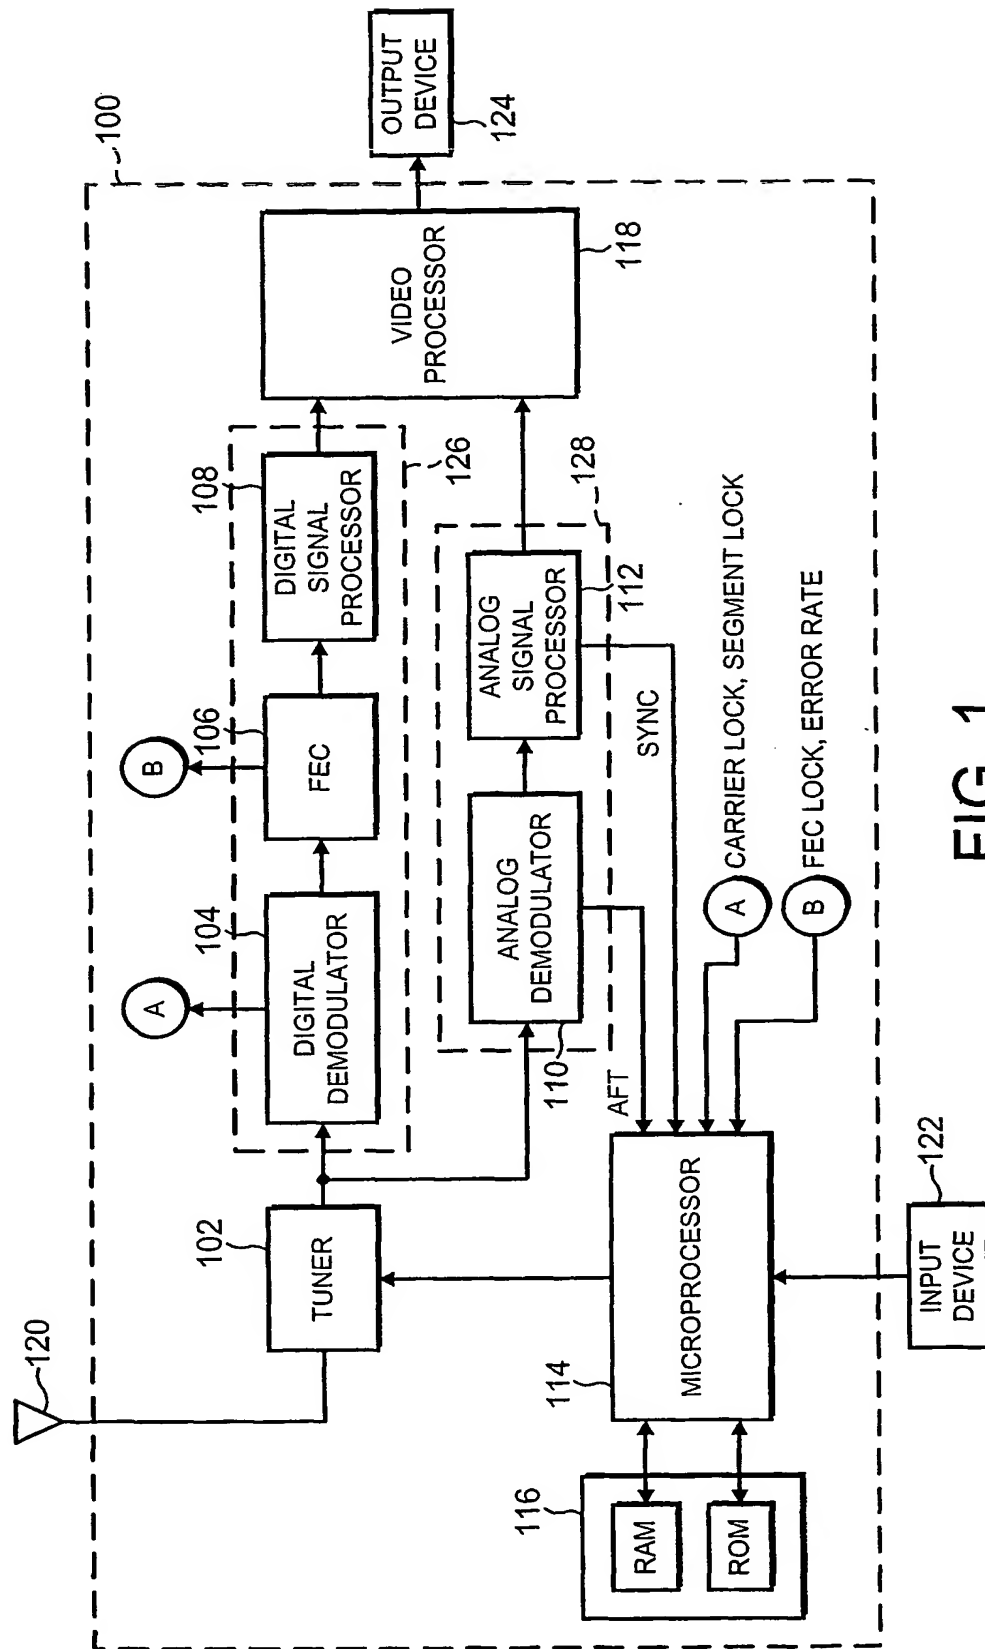


FIG. 1

2 / 4

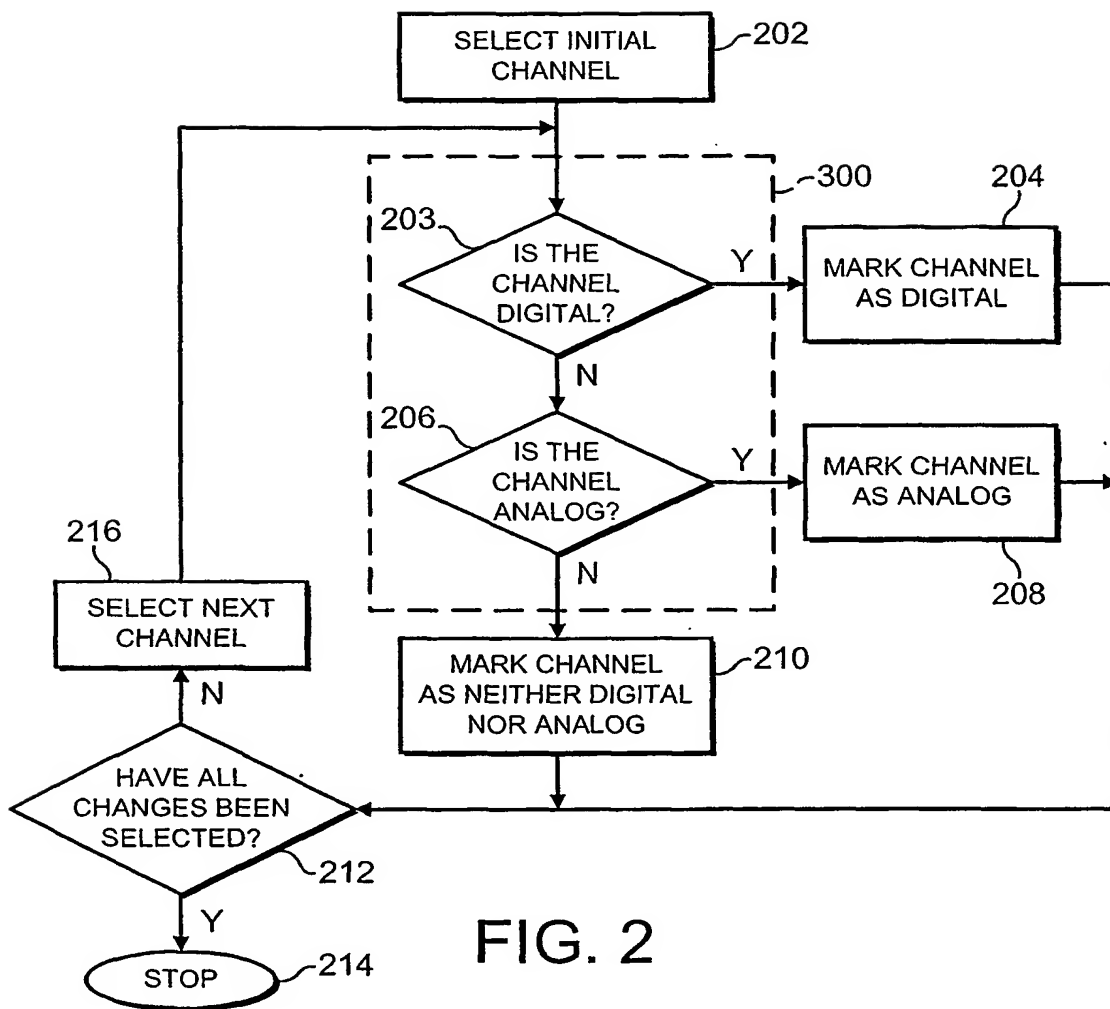


FIG. 2

3 / 4


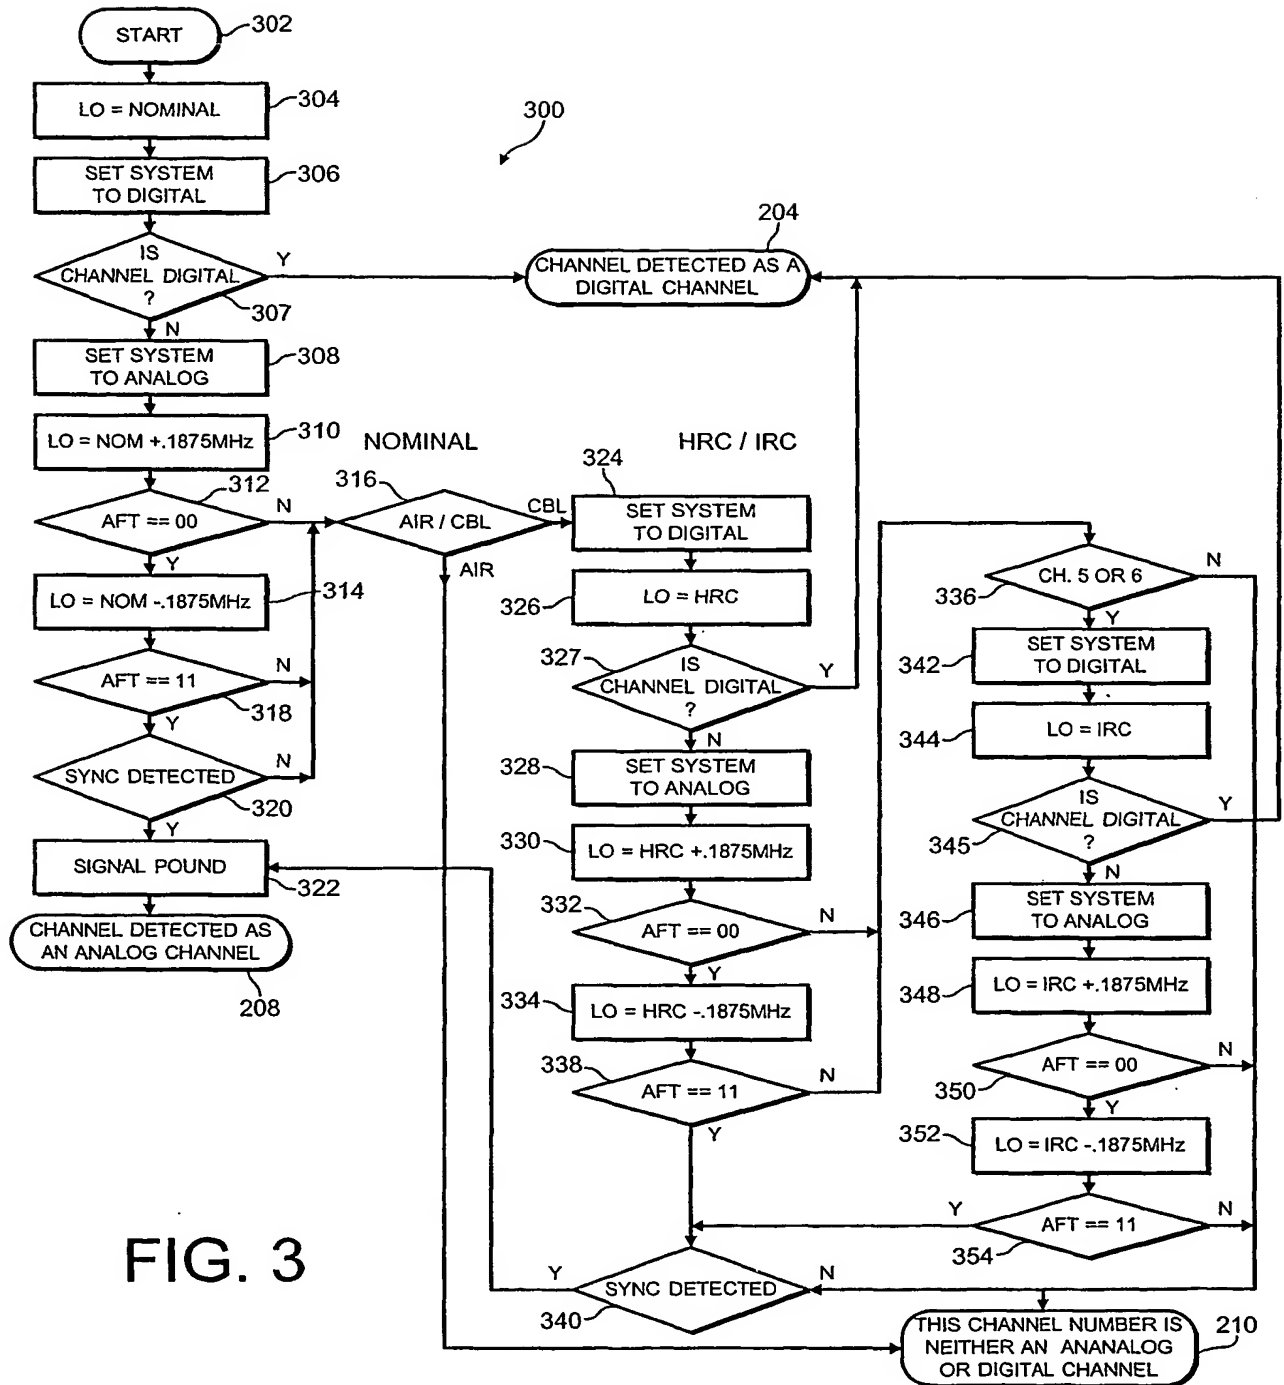


FIG. 3

FIG. 4

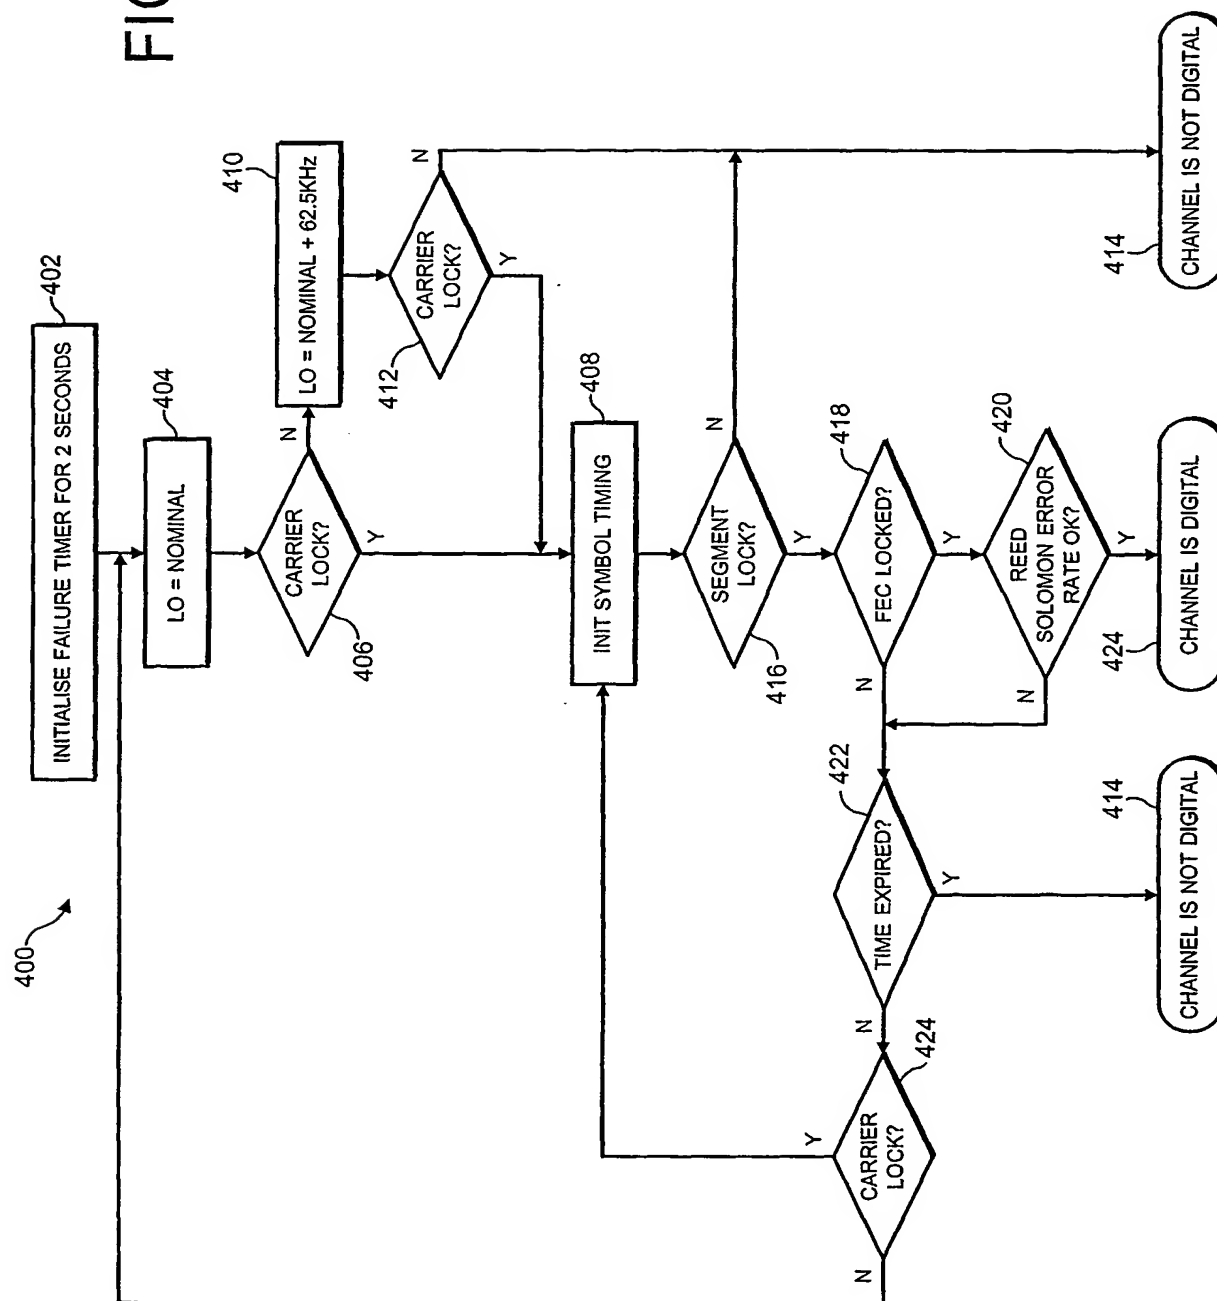

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/19059

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N5/50

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 2 325 805 A (DAE WOO ELECTRONICS CO LTD) 2 December 1998 (1998-12-02)	1,2,8,14
A	the whole document	
Y	EP 0 574 273 A (TOSHIBA AVE KK ; TOKYO SHIBAURA ELECTRIC CO (JP)) 15 December 1993 (1993-12-15)	1,2,8,14
A	column 7, line 54 -column 8, line 39 column 10, line 54 -column 11, line 54; figure 6	3,15
A	EP 0 912 050 A (SAMSUNG ELECTRONICS CO LTD) 28 April 1999 (1999-04-28) column 4, line 26 -column 5, line 22 column 5, line 50 -column 6, line 45	1,6-8, 10,16
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

26 September 2000

Date of mailing of the international search report

02/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Fuchs, P

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/19059

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 805 230 A (STARON ALAIN) 8 September 1998 (1998-09-08) column 1, line 49 -column 2, line 30 column 3, line 47 -column 5, line 65; figures 2,3 -----	1,8,14
A	EP 0 766 462 A (SAMSUNG ELECTRONICS CO LTD) 2 April 1997 (1997-04-02) column 3, line 53 - line 47 column 14, line 10 - line 45; figures 1,2,5 column 16, line 5 - line 52; figure 8 -----	1,8,14

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/19059

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
GB 2325805	A	02-12-1998	JP 10341176	A	22-12-1998
EP 0574273	A	15-12-1993	JP 5347736	A	27-12-1993
			CA 2098372	A	13-12-1993
			DE 69320868	D	15-10-1998
			DE 69320868	T	28-01-1999
			KR 9615838	B	21-11-1996
			US 5418815	A	23-05-1995
EP 0912050	A	28-04-1999	KR 222994	B	01-10-1999
US 5805230	A	08-09-1998	FR 2717026	A	08-09-1995
			EP 0696402	A	14-02-1996
			WO 9524098	A	08-09-1995
			JP 9501555	T	10-02-1997
EP 0766462	A	02-04-1997	CN 1151656	A	11-06-1997
			JP 9130697	A	16-05-1997
			KR 213048	B	02-08-1999
			US 6014178	A	11-01-2000
			US 5926228	A	20-07-1999